

SOLLEVATORI OLEOPNEUMATICI A CARRELLO

AIR HYDRAULIC TROLLEY JACKS

109/C

108/S



YAK 109/C

Sollevatore Oleopneumatico a carrello, pratico e maneggevole. Rientro automatico del braccio; le due valvole di discesa garantiscono una tenuta perfetta in ogni situazione e una velocità controllata sotto carico. La combinazione tra altezza minima, altezza massima e portata lo rendono versatile e particolarmente indicato per autovetture, camper, furgoni, autocarri medi, rimorchi e tutti i mezzi con una massa complessiva non superiore ai 12t. (13.2t) Ideale per officine, gommisti e carrozzerie.

YAK 108/S

Sollevatore Oleopneumatico a carrello, pratico e maneggevole. Ora equipaggiato con ruote piroettanti per facilitarne l'utilizzo anche negli spazi più ristretti. La combinazione tra altezza minima, altezza massima e portata lo rendono versatile e particolarmente indicato per autovetture, camper. Ideale per officine, gommisti e carrozzerie.

YAK 109/C

Air hydraulic trolley jack, practical and easy to handle. The arm moves back automatically; the two descent valves guarantee perfect holding in all situations and controlled speed under load. Thanks to minimum height, maximum height and capacity these jacks are flexible and particularly suitable for cars, campers, vans, medium sized lorries, trailers and all vehicles weighing no more than 12t. (13.2 ton) Ideal for workshops, tyre repairers and bodywork shops.


YAK 108/S

Air hydraulic trolley jack, practical and easy to handle. Now equipped with pivoting wheels to facilitate use even in the smallest spaces. Thanks to minimum height, maximum height and capacity these jacks are flexible and particularly suitable for cars, campers, vans. Ideal for workshops, tyre repairers and bodywork shops.

| | YAK 109/C | YAK 108/S |
|--|-------------------------|-------------------------|
| Portata Capacity | 5 t 5.5 ton | 3 t 2.9 ton |
| Peso netto Net weight | 75 kg 165 lb | 65 kg 143 lb |
| Pressione di alimentazione Working air pressure | 8-10 bar 116-145 psi | 8-10 bar 116-145 psi |
| Consumo d'aria Air waste | 400 nl/min | 400 nl/min |

ACCESSORI INCLUSI INCLUDED ACCESSORIES


(Solo YAK 109/C - YAK 109/C only)



1xA02367

Gli accessori opzionali compatibili sono elencati all'ultima pagina.

Compatible optional accessories can be found on the last page.

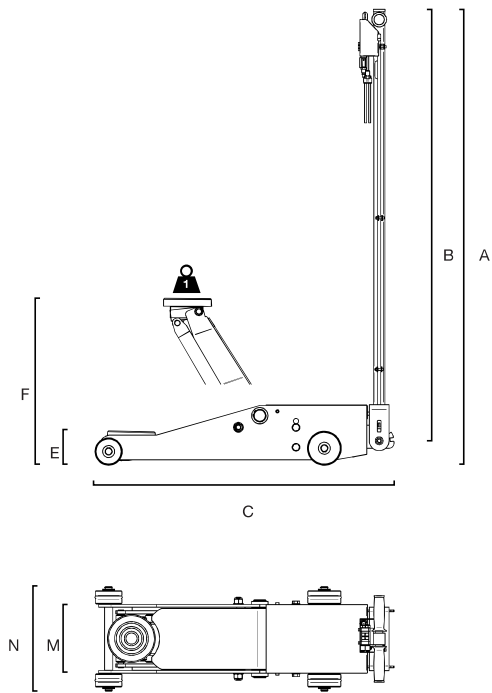

| | YAK 109/C | YAK 108/S |
|---|---------------------|---------------------|
| A | 1390 mm 54.72 in | 1436 mm 56.53 in |
| B | 1310 mm 51.57 in | |
| C | 910 mm 35.82 in | 1090 mm 42.91 in |
| E | 95 mm 3.74 in | 88 mm 3.5 in |
| F | 500 mm 16.69 in | 676 mm 16.6 in |
| M | 208 mm 8.19 in | 440 mm 17.32 in |
| N | 208 mm 8.19 in | |



5 t
5.5 ton

3 t
3.3 ton



| | YAK109/C | YAK108/S |
|----------|----------|----------|
| Car | • | • |
| Van | • | • |
| Truck | • | • |
| Bus | • | • |
| Truck | • | • |
| Forklift | • | |
| Tractor | • | • |