


## LIFTING TABLE



# CASCOS 60600E-C





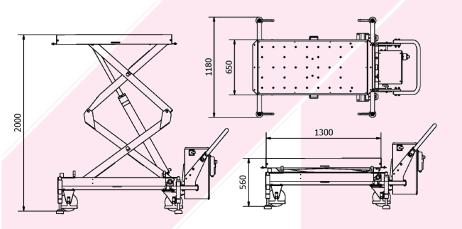

### Technical data

### Mechanical:

Maximum capacity: 1500 kg

Lifting category: 1 IP code: 54

Load type: Distributed load

Net weight: 430kg

Rise time (fast/slow) without load: 63s/195s

No-load download time: 73s Maximum height: 2000mm Minimum height: 560 mm

Platform dimensions:1300mm x 650mm

Lift table tilt angles:

- 2nd in the transverse dimension (Y axis) - 1.37° in the longitudinal dimension (X axis) Working temperature range: -10°C / +50°C

Storage temperature range: 0°C / +40°C

### Electrical:

Power unit: 230V/50Hz (1Ph) Power/Intensity: 2.2 kW – 14ª Voltage control circuit: 24V Loudness level: <70 dB (A)

### Hydraulic:

Use pressure: 200 bar. Oil tank volume: Max. 4l

Recommended oil refill period: 12 months Hydraulic oil type:HLP46 (DIN 51524 Part. 2)

Hydraulic cylinder: 1x Ø90 mm





















Ref. 60600C-E

Exclusive details

### **LIFTING TABLE**

# **CASCOS 60600E-C**

### UNE-EN 1570-1 2012+A1 2015



Wired portable hand set. Curly cable from 1 to 3 meters. Magnetic fixation. Up, down, emergency stop and speed selector functions:


- Fast speed.
- Approach speed.



Platform with M10 threaded holes. Those marked in orange are M12 for fixing the TOP-CRIS V24 (Optional)

Maximum load

**CERTIFIED** 






### Guaranteed repairability for a minimum of 10 years.

Parts supply will be ensured during this time period.


High capacity wheels provided with anti-entrapment system. Levelers - 4 point stabilizers, which allow inclinations of up to 2º



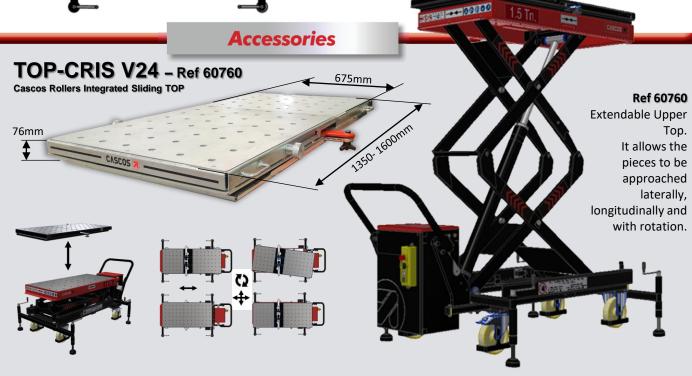



Ref 94503 Strap



Ref 60655T Protective curtain

www.cascos.es



CASCOS (7)



#### CASCOS MAQUINARIA, S.A.

Zurrupitieta, 8 - Pol. Ind. Júndiz • Apartado 264 01015 VITORIA-GASTEIZ / España/Spain Tel. +34 945 290 294 / Fax +34 945 290 055 e-mail: info@cascos.es