

For motorcycle tyre specialists, servicing motorcycles, scooters and ATV tyres.



Discover on our [website!](#)

S226 BIKE PRO LNL



Sturdy, user friendly and problem solving tyre changer to help best professionals in the field.

AUTOMATIC LEVER - NO LEVER TILT BACK TYRE CHANGER FOR MOTORCYCLES, SCOOTERS & ATV TYRES. EQUIPPED WITH ADDITIONAL ARM



Kit of 4 motorcycles adaptors with wider clamps, oversize / standard height (optional).

Reinforced Chassis.

PRESS ARM ECO Additional arm to ease mounting operations of low profiled and UHP tyres (standard).

Designed, built and engineered in Italy.

Lever-No-Lever tyre mounting / demounting system [Giuliano Patent], (standard).


Four motorcycle clamping jaws adjustable to 4 different positions: 6"-13", 10"-17", 14"-21", 17"-24".

Tabletop thickness 12 mm, specially designed for motorcycle wheels.

Two powerful clamping cylinders provide uniform clamping pressure.

"Easy Access" extractable pedal box for quick service

BMW Motorrad approved version is available through official BMW channels.

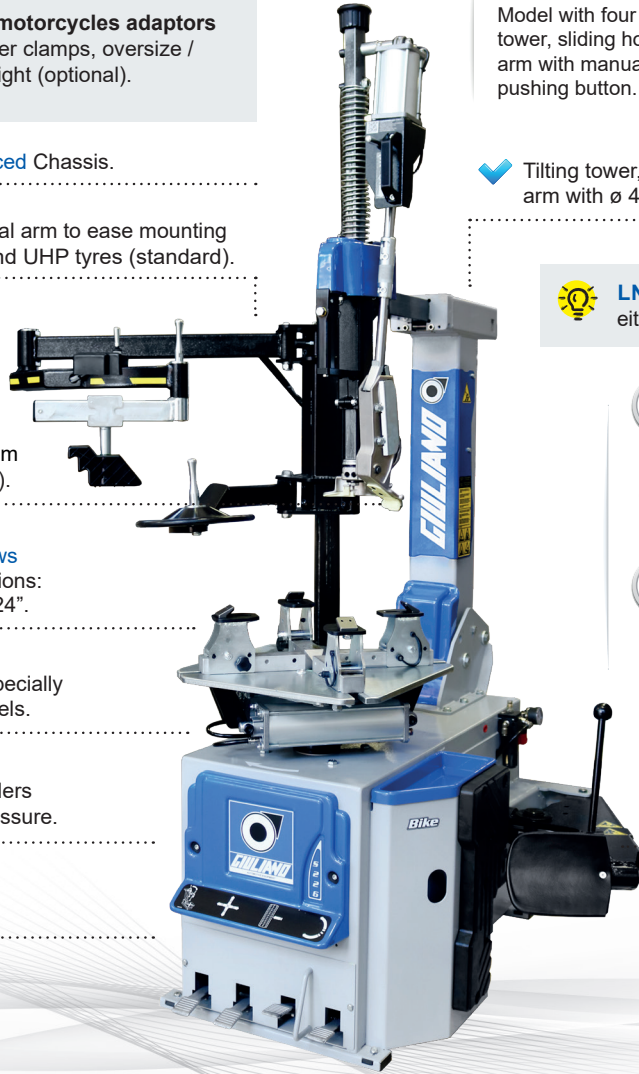

Automatic

Model with four control pedals, tilting tower, sliding horizontal arm and operating arm with manual lowering and locking by pushing button.



5 YEAR WARRANTY ON GEARBOX

Tilting tower, sliding horizontal arm with \varnothing 41 mm operating arm.



LNL SYSTEM [Giuliano Patent] can work either with or without bead lifting lever, standard.



"NO LEVER" MODE

Control lever to manage movements of the tool.



"LEVER" MODE

"LEVER" & "NO LEVER" Mode control handle

Bead breaker double effect Cylinder \varnothing 200 mm.

Robust and high-performance product for intensive use.

Tyre inflating gauge (optional). Tyre inflation by pedal (optional).



Available in:

- Blue Trim
- Black Trim
- Red Trim



PEDAL INFLATION SET. Installed on the side of the tyre changer, provides inflation system on board the tyre changer, activated by pedal (optional).



STANDARD FEATURES

Rim clamping from outside	6" - 24"
Max. tyre diameter	1110 mm (43")
Max. tyre width	240 mm (9.5")
Bead breaker cylinder force at 10 Bar	30800 N
Operating pressure	10 bar (145 Psi)
Power supply	400V - 3 ph / 220V - 1 ph
Motor power	0,55 kW (3 ph)
Rotation speed	7 rpm
Pre-set tyre inflating pressure	3,5 bar (50 Psi)
Net weight	298 kg
Max. overall dimensions	1920x1820x1932 mm

STANDARD ACCESSORIES



EXTENSIVE SELECTION OF STANDARD ACCESSORIES

- Bead lifting lever
- Lube paste bucket and Brush
- Plastic protectors for LNL mounting/demounting tool (3 front + 3 rear)
- 2 Protectors for bead breaker shovel
- Lubricator + Pressure regulator
- Bucket support